

**BOE**

To : \_\_\_\_\_

BOE	REQ. Date	2022-1-24
	REF. No.	

# APPROVAL

INSPECTED BY	
CHECKED BY	
APPROVED BY	
DATE	

No	PART NO.	DESCRIPTION	SPECIFICATION
	ET121S0M-N14	12.1 Inch MDL	B3 ET121S0M-N14 Product Specification Rev.P0  VISUAL INSPECTION CRITERIA FOR ALL CUSTOMERS (12.1" A Grade)

PLEASE KINDLY FIND AND APPROVE THE SPECIFICATIONS INSERTED HEREIN AND RETURN ONE COPY HERE OF WITH YOUR SIGNATURE OF APPROVAL.

---

CONFIRMED BY MEDICAL BU

---

CONFIRMED BY QA

---

CONFIRMED BY R&D

**HEFEI BOE OPTOELECTRONICS TECHNOLOGY CO.,LTD**

PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>
TFT- LCD PRODUCT		P1	2022-1-20	
SPEC. NUMBER S8-*	SPEC. TITLE B3 ET121S0M-N14 Product Specification		PAGE 1 OF 29	

## **B3 ET121S0M-N14 Product Specification Rev.P0**

BUYER	
SUPPLIER	HEFEI BOE Optoelectronics Technology CO., LTD
FG-Code	ET121S0M-N14-DHP0/ET121S0M-N14-3HP0

ITEM	BUYER SIGNATURE	DATE	ITEM	SUPPLIER SIGNATURE	DATE
	_____	_____	Prepared	_____	_____
	_____	_____	Reviewed	_____	_____
	_____	_____	Approved	_____	_____

R2015-6014-O

PRODUCT GROUP		REV	ISSUE DATE	BOE
TFT- LCD PRODUCT		P1	2022-1-20	
SPEC. NUMBER	SPEC. TITLE			PAGE
S8-*	B3 ET121S0M-N14 Product Specification			2 OF 29
REV.	ECN No.	DESCRIPTION OF CHANGES	DATE	PREPARED
P0		Initial Release	2021-12-07	ALL
P1		P19 update CIE	2021-1-20	Liang fuxue

R2015-6014-O

PRODUCT GROUP	REV	ISSUE DATE	<b>BOE</b>
TFT- LCD PRODUCT	P1	2022-1-20	
SPEC. NUMBER S8-*	SPEC. TITLE B3 ET121S0M-N14 Product Specification		PAGE 3 OF 29

## Contents

No.	Items	Page
1.0	General Description	4
2.0	Absolute Maximum Ratings	6
3.0	Electrical Specifications	7
4.0	Optical Specifications	16
5.0	Reliability Test	21
6.0	Packing Information	22
7.0	Product Label	24
8.0	Handling & Cautions	25
9.0	Appendix	28


R2015-6014-O

PRODUCT GROUP	REV	ISSUE DATE	BOE
TFT- LCD PRODUCT	P1	2022-1-20	
SPEC. NUMBER	SPEC. TITLE		PAGE
S8-*	B3 ET121S0M-N14 Product Specification		4 OF 29

## 1.0 GENERAL DESCRIPTION

### 1.1 Introduction

ET121S0M-N14 is a color active matrix TFT LCD module using amorphous silicon TFT 's (Thin Film Transistors) as an active switching devices. This module has a 12.1 inch diagonally measured active area with SVGA resolutions (800 horizontal by 600 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 16.7M colors.

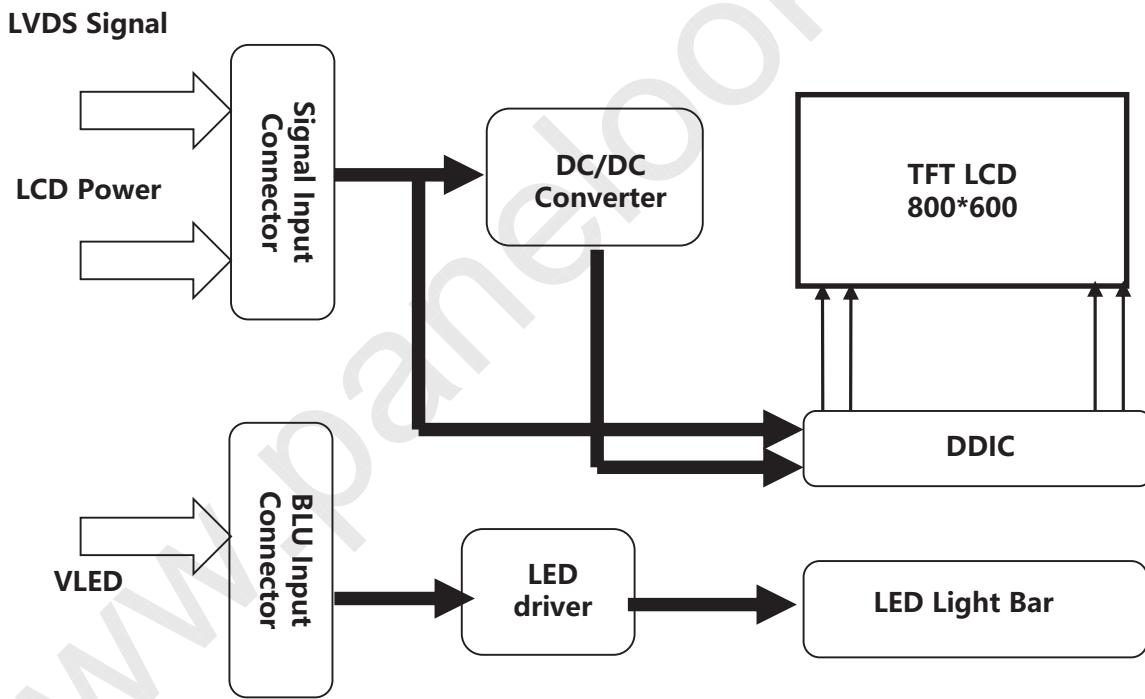

### 1.2 Features

- 0.5T Glass (Single) ;
- Module Design
- 6/ 8bits LVDS data input selection
- Thin and light weight
- High luminance and contrast ratio, low reflection and wide viewing angle
- RoHS compliant

PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>
TFT- LCD PRODUCT		P1	2022-1-20	
SPEC. NUMBER S8-*	SPEC. TITLE B3 ET121S0M-N14 Product Specification			PAGE 5 OF 29

### 1.3 Application

- Medical Monitor

### 1.4 General Specification

The followings are general specifications

**<Table 1. LCD Module Specifications>**

Parameter	Specification	Unit	Remarks
Active Area	246(H)*184.5(V)	mm	
Number Of Pixels	800(H)×600(V)	pixels	
Pixel Pitch	0.3075(H)×RGB×0.3075(V)	mm	
Pixel Arrangement	Pixels RGB stripe arrangement		
Display Mode	Normally White		
Display Colors	262K/16.7M	colors	
Display Mode	Transmissive mode		
Surface Treatment	AG25 (CF) , Clear (TFT)		
Contrast Ratio	800:1(typ.)		
Viewing Angle(CR>10)	80/80/65/75(typ.)	deg.	
Response Time	30(typ.)	ms	
Color Gamut	55%		
Brightness	320(min)/400(typ)	cd/m <sup>2</sup>	
Brightness Uniformity	9 point: min 75% 9 point: typ 80%		
Power Consumption	5.3 W(Max.)	watt	
Outline Dimension	279(H)*209(V)*9.0(typ)	mm	
Weight	630 (MAX)	gram	

R2015-6014-O

PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>
TFT- LCD PRODUCT		P1	2022-1-20	
SPEC. NUMBER S8-*	SPEC. TITLE B3 ET121S0M-N14 Product Specification		PAGE 6 OF 29	


## 2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 3. Absolute Maximum Ratings>

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply	LCD Module	VCC	VSS-0.3	3.9	Ta = 25 °C
	BLU	VLED	VSS-0.3	24	
Operating Temperature	T <sub>OP</sub>	-20	+70	°C	Note 1
Storage Temperature	T <sub>ST</sub>	-30	+80	°C	

Note : 1) Temperature and relative humidity range are shown in the figure below.  
Wet bulb temperature should be 39 °C max. and no condensation of water.

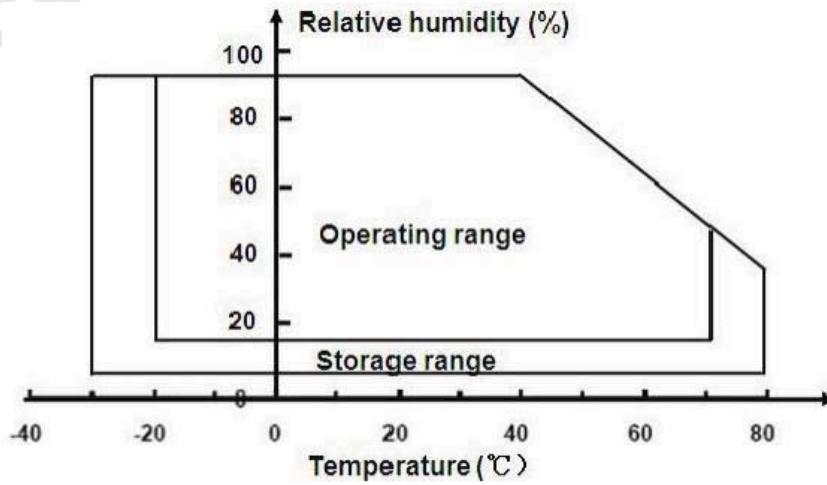

R2015-6014-O

PRODUCT GROUP	REV	ISSUE DATE	BOE
TFT- LCD PRODUCT	P1	2022-1-20	
SPEC. NUMBER S8-*	SPEC. TITLE B3 ET121S0M-N14 Product Specification		PAGE 7 OF 29

### 3.0 ELECTRICAL SPECIFICATIONS

### 3.1 TFT LCD Module

#### < Table 4. LCD Module Electrical specifications >



[Ta = 25 ± 2 °C]

Parameter	Symbol	Values			Unit	Notes
		Min.	Typ.	Max.		
Power Supply Voltage	VDD	3.0	3.3	3.6	V	
Power Supply Current	IDD	90.63	122.4	153.4	mA	
Power Consumption	PLCD	0.299	0.403	0.506	W	TBD

Notes : 1. The supply voltage is measured and specified at the interface connector of LCM.

The current draw and power consumption specified is for VDD=3.3V, Frame rate  $f_V=60\text{Hz}$  and Clock frequency = 33MHz. Test Pattern of power supply current

a) Typ : Mosaic 8 x 6 Pattern(L0/L255)      b) Max : black

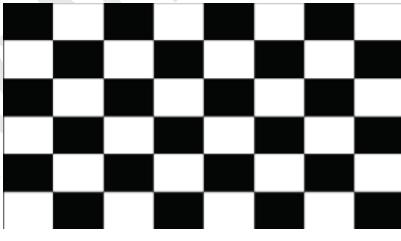

2. The duration of rush current is about 2ms and rising time of Power Input is 1ms(min)

R2015-6014-O

PRODUCT GROUP		REV	ISSUE DATE	BOE
TFT- LCD PRODUCT		P1	2022-1-20	
SPEC. NUMBER S8-*	SPEC. TITLE B3 ET121S0M-N14 Product Specification			PAGE 8 OF 29

### 3.2 Back-Light Unit

Table 4. LED Dirver Electrical Specifications >

[Ta = 25±2 °C]

Parameter	Symbol	Values			Unit	Notes
		Min.	Typ.	Max.		
BLU Supply Voltage	VDD	11.5	12	12.5	V	
BLU Forward Current	I <sub>VDD</sub>	352.4	367	383	mA	
Power Consumption	P <sub>LED</sub>	-	4.4	4.8	W	Note 1
BLU BRTC Level	BLU ON	3.0	3.3	3.6	V	
	BLU OFF	0		0.5	V	
PWMIN	Level	High Level	1.9	-	-	V
		Low Level	0	-	0.8	V
	Frequency	F <sub>PWM</sub>	200	-	20K	Hz
	Duty Ratio	D <sub>PWM</sub>	1	-	100	%
LED Life Time		TLED	30000	-	-	Hrs
						Note 2/3

Notes:

1. PLED = VDD × I<sub>VDD</sub> (Within LED converter transfer efficiency)
2. The life time of LED, 30,000Hrs, is determined as the time at which luminance of the LED is 50% compared to that of initial value at the typical LED current on condition of continuous operating at 25 ± 2°C.
3. Only under the above operating conditions could the life time of LED be guaranteed.

R2015-6014-O

PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>
TFT- LCD PRODUCT		P1	2022-1-20	
SPEC. NUMBER S8-*	SPEC. TITLE B3 ET121S0M-N14 Product Specification		PAGE 9 OF 29	

### 3.4 INPUT TERMINAL PIN ASSIGNMENT

This LCD employs two interface connections, a 20 pin ZIF connector is used for the LCD module electronics interface and a 5 pin ZIF connector is used for the internal backlight system.

#### 3.4.1 Pin assignment for LCD module

Connector : MSB240420HEA or equivalent

< Table7. Pin Assignment for LCD Module Connector >

Pin No.	Symbol	Description	I/O
1	VCC	Power supply	P
2	VCC	Power supply	P
3	GND	Ground	-
4	SEL	VCC:8Bits; GND/NC:6Bits	I
5	RINO-	LVDS signal input	I
6	RINO+	LVDS signal input	I
7	GND	Ground	-
8	RIN1-	LVDS signal input	I
9	RIN1+	LVDS signal input	I
10	GND	Ground	-
11	RIN2-	LVDS signal input	I
12	RIN2+	LVDS signal input	I
13	GND	Ground	-
14	CLKIN-	LVDS clock input	I
15	CLKIN+	LVDS clock input	I
16	GND	Ground	-
17	RIN3-	LVDS signal input	I
18	RIN3+	LVDS signal input	I
19	NC	SDA,For BOE Use	-
20	NC	SCL, For BOE Use	-

R2015-6014-O

PRODUCT GROUP		REV	ISSUE DATE	BOE
TFT- LCD PRODUCT		P1	2022-1-20	
SPEC. NUMBER	SPEC. TITLE			PAGE
S8-*	B3 ET121S0M-N14 Product Specification			10 OF 29

### 3.4.2 Pin assignment for LED Bar

Connector : MSB24038P5 (STM) or equivalent

< Table8. Pin assignment for LED Bar >

Pin No	Symbol	Description	Remarks
1	NC	STBYB, For BOE Use	
2	PWM	Luminance control	
3	EN	3.3V-on / 0V-off	
4	GND	Ground	
5	VLED	Power supply	12V


PRODUCT GROUP		REV	ISSUE DATE	BOE
TFT- LCD PRODUCT		P1	2022-1-20	
SPEC. NUMBER	SPEC. TITLE			PAGE
S8-*	B3 ET121S0M-N14 Product Specification			11 OF 29

### 3.5.2 DC Specification


< Table11. DC Specification >

Parameter	Symbol	Min	Typ.	Max.	Unit	Conditions
Differential input high threshold voltage	$R_{xVTH}$			0.1	V	
Differential input low threshold voltage	$R_{xVTL}$	-0.1			V	$R_{xVCM} = 1.2V$
Input voltage range (singled-end)	$R_{xVIN}$	0		VDD-1.2	V	
Differential input common mode voltage	$R_{xVCM}$	0.8	1.2	1.4	V	
Differential input voltage	$ V_{ID} $	0.2	0.4	0.6	V	
Differential input leakage current	$RV_{xIIZ}$	-10		10	uA	
Digital Operating Current	$I_{VDD}$		(TBD)		mA	$FCLK=80$ MHz , $V15D\_RX=1.5V$ , Data pattern=FF/H
Digital Stand-by Current	$I_{STBD}$		800		uA	$RSTB=0$ or $STBYB=0$ , Clock & all functions are stopped.

#### Single end signals



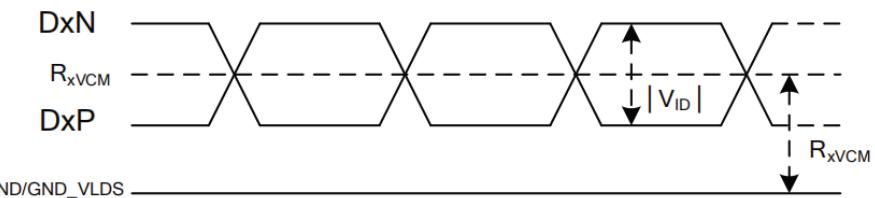


#### Differential signals

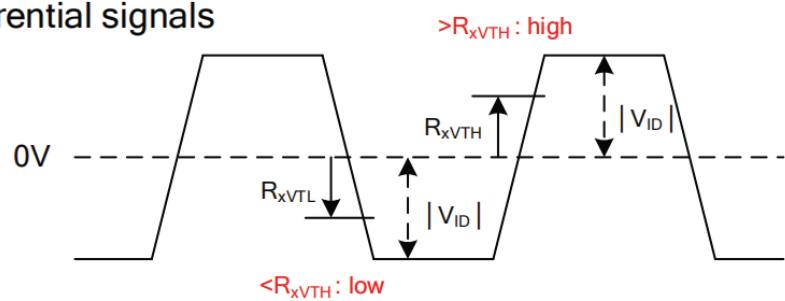

PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>
TFT- LCD PRODUCT		P1	2022-1-20	
SPEC. NUMBER	SPEC. TITLE			PAGE
S8-*	B3 ET121S0M-N14 Product Specification			12 OF 29

### 3.5.3 AC Specification

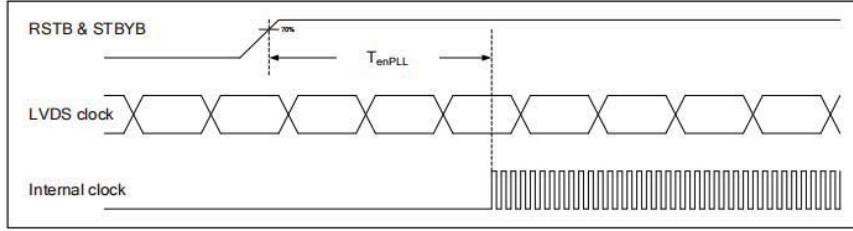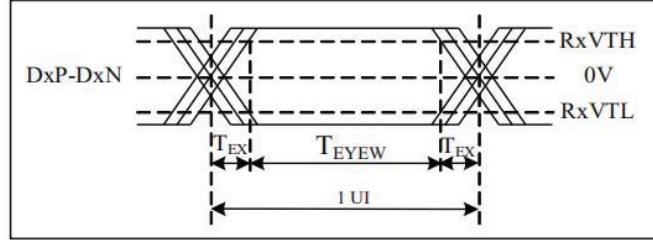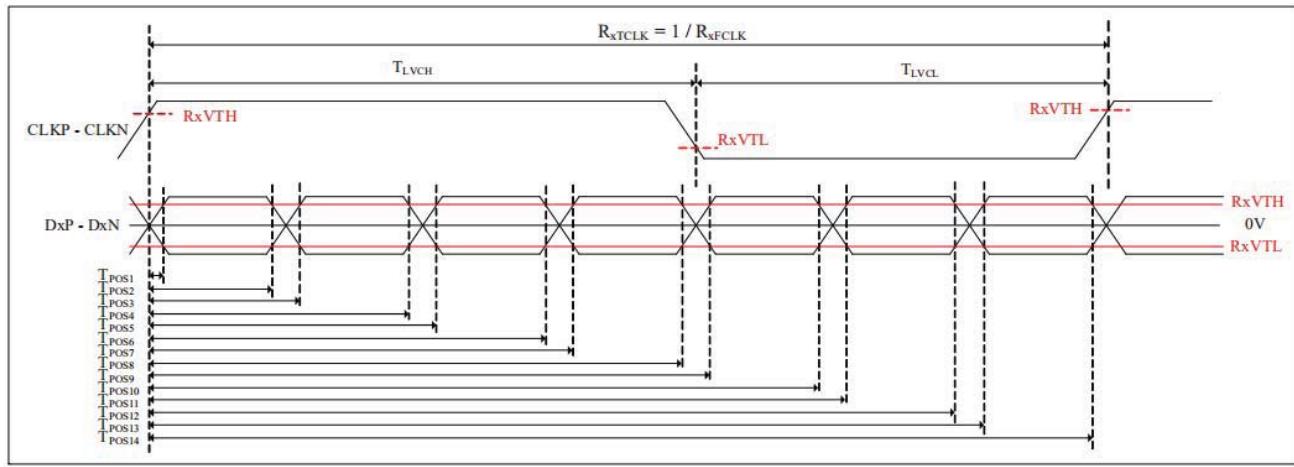

#### Note:

- (1) T<sub>BIT</sub>: Data period
- (2) Internal CLK sampling data window

< LVDS channel to channel skew >

PRODUCT GROUP		REV	ISSUE DATE	BOE
TFT- LCD PRODUCT		P1	2022-1-20	
SPEC. NUMBER	SPEC. TITLE			PAGE
S8-*	B3 ET121S0M-N14 Product Specification			13 OF 29

### 3.5.3 AC Specification

< Table12. AC Specification >


Parameter	Symbol	Min	Typ.	Max.	Unit	Conditions
Clock Frequency	R <sub>xFCLK</sub>	20		105 85	MHz	Max. 105MHz for single port LVDS with one SC5015 panel. Max. 85MHz for dual port LVDS, L&R two port LVDS, single port multi-drop LVDS panel.
Clock Period	R <sub>xTCLK</sub>	9.5 11.8		50	ns	Min. 9.5ns for single port LVDS with one SC5015 panel. Min. 11.8ns for dual port LVDS, L&R two port LVDS, single port multi-drop LVDS panel.
1 data bit time	UI	-	1/7	-	R <sub>xTCLK</sub>	
Clock high time	T <sub>LVCH</sub>		4		UI	
Clock low time	T <sub>LVCL</sub>		3		UI	
Position 1	T <sub>POS1</sub>	-0.25	0	0.25	UI	
Position 2	T <sub>POS2</sub>	0.75	-	1.25	UI	
Position 3	T <sub>POS3</sub>	0.75	1	1.25	UI	
Position 4	T <sub>POS4</sub>	1.75	-	2.25	UI	
Position 5	T <sub>POS5</sub>	1.75	2	2.25	UI	
Position 6	T <sub>POS6</sub>	2.75	-	3.25	UI	
Position 7	T <sub>POS7</sub>	2.75	3	3.25	UI	
Position 8	T <sub>POS8</sub>	3.75	-	4.25	UI	
Position 9	T <sub>POS9</sub>	3.75	4	4.25	UI	
Position 10	T <sub>POS10</sub>	4.75	-	5.25	UI	
Position 11	T <sub>POS11</sub>	4.75	5	5.25	UI	
Position 12	T <sub>POS12</sub>	5.75	-	6.25	UI	
Position 13	T <sub>POS13</sub>	5.75	6	6.25	UI	
Position 14	T <sub>POS14</sub>	6.75	-	7.25	UI	
Input eye width	T <sub>EYEW</sub>	0.5	-	-	UI	
Input eye border	T <sub>EX</sub>	-	-	0.25	UI	
PLL wake-up time	T <sub>enPLL</sub>			150	us	

PRODUCT GROUP		REV	ISSUE DATE	BOE
TFT- LCD PRODUCT		P1	2022-1-20	
SPEC. NUMBER	SPEC. TITLE			PAGE
S8-*	B3 ET121S0M-N14 Product Specification			14 OF 29

### 3.6 Interface timing Parameter

< Table13. Timing Parameter >

Item		Symbol	min	typ	max	UNIT
LCD	Frame Rate	-	50	60	65	Hz
	Pixels Rate	-	-	33.0	68.1	MHz
Timing	Horizontal	Horizontal total time	tHP	860	860	1300
		Horizontal Active time	tHadr	800		
		Horizontal Back Porch	tHBP	30	30	255
		Horizontal Front Porch	tHFP	30	30	245
	Vertical	Vertical total time	tvp	620	640	806
		Vertical Active time	tVadr	600		
		Vertical Back Porch	tVBP	10	20	100
		Vertical Front Porch	tVFP	10	20	106
Lane			-	1	-	Port

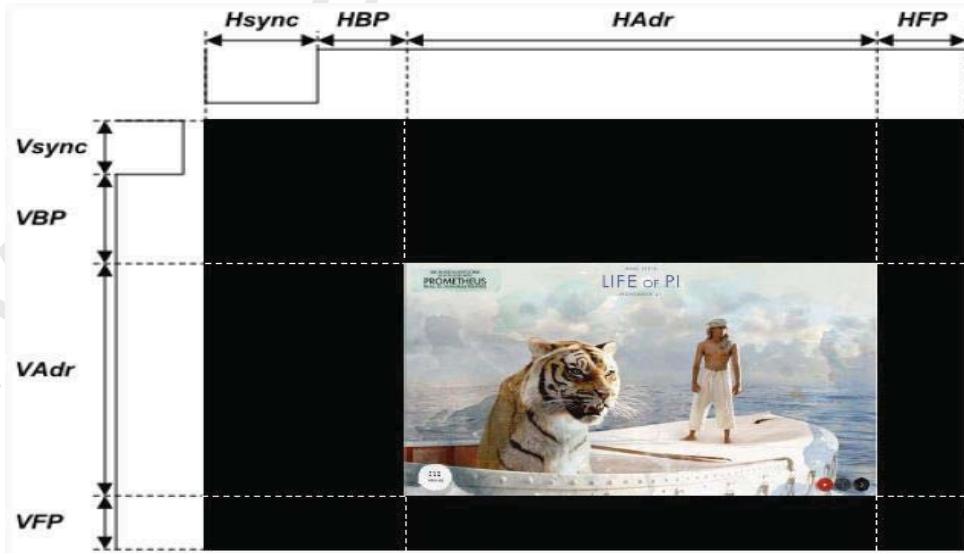


R2015-6014-O

PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>
TFT- LCD PRODUCT		P1	2022-1-20	
SPEC. NUMBER	SPEC. TITLE			PAGE
S8-*	B3 ET121S0M-N14 Product Specification			15 OF 29

### 3.7 Power Sequence

[Ta = 25±2 °C]

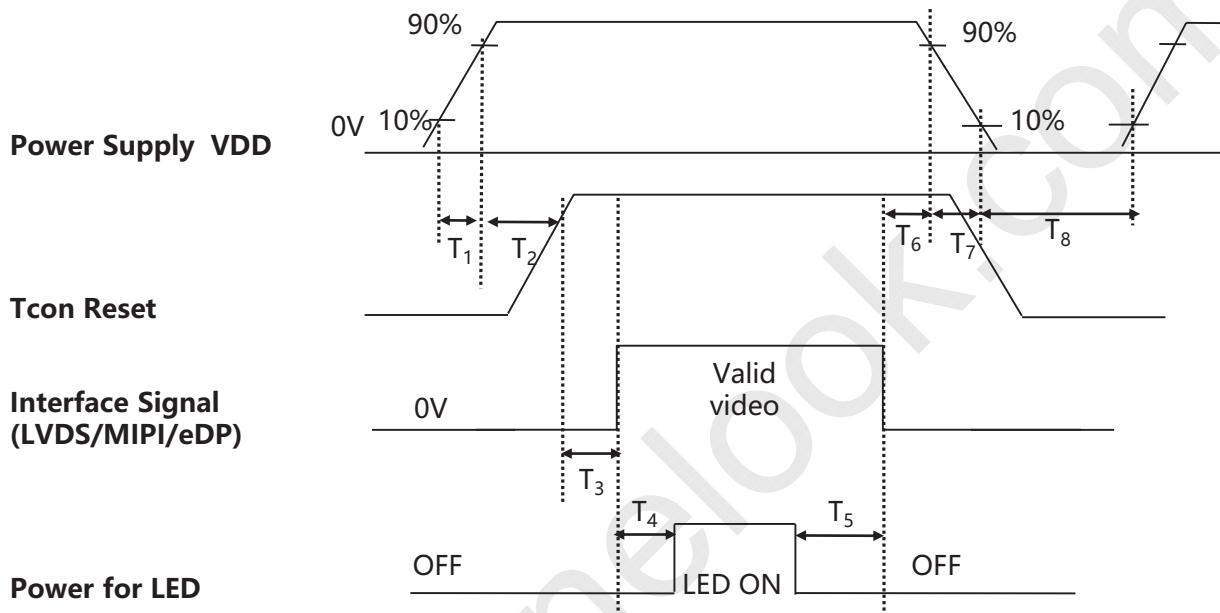

< Table15. Sequence Table >

Parameter	Value			Units
	Min.	Typ.	Max.	
T1	0.1	-	5	(ms)
T2	1	-	30	(ms)
T3	5	-	100	(ms)
T4	200	-	-	(ms)
T5	200	-	-	(ms)
T6	0	-	50	(ms)
T7	0	-	10	(ms)
T8	500	-	-	(ms)

R2015-6014-O

PRODUCT GROUP		REV	ISSUE DATE	BOE
TFT- LCD PRODUCT		P1	2022-1-20	
SPEC. NUMBER	SPEC. TITLE			PAGE
S8-*	B3 ET121S0M-N14 Product Specification			16 OF 29

## 4.0 OPTICAL SPECIFICATIONS

### 4.1 Overview

The test of optical specifications shall be measured in a dark room (ambient luminance  $\leq$  1lux and temperature =  $25\pm2^{\circ}\text{C}$ ) with the equipment of Luminance meter system (Gonio meter system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of  $\theta$  and  $\Phi$  equal to  $0^{\circ}$ . We refer to  $\theta\Phi=0$  ( $=\theta3$ ) as the 3 o' clock direction (the "right"),  $\theta\Phi=90$  ( $=\theta12$ ) as the 12 O' clock direction ("upward"),  $\theta\Phi=180$  ( $=\theta9$ ) as the 9 O' clock direction ("left") and  $\theta\Phi=270$  ( $=\theta6$ ) as the 6 O' clock direction ("bottom"). While scanning  $\theta$  and/or  $\Phi$ , the center of the measuring spot on the Display surface shall stay fixed.

### 4.2 Optical Specifications < Table16. Optical Table >


Item	Symbol	Condition	Min	Typ.	Max	Unit	Note
<b>luminance</b>	Bp	$\theta=0^{\circ}$	320	400	--	cd/m <sup>2</sup>	<u>Note 1</u>
<b>Brightness Uniformity</b>	$\Delta Bp$		75	80	--	%	<u>Note 2</u>
<b>Viewing Angle</b>	$\theta_L$	$\text{Cr} \geq 10$	70	80	--	deg	<u>Note 3</u>
	$\theta_R$		70	80	--		
	$\Psi_T$		55	65	--		
	$\Psi_B$		65	75	--		
<b>Contrast Ratio</b>	Cr	$\theta=0^{\circ}$	600	800		-	<u>Note 4</u>
<b>Response Time</b>	Tr+Tf	$\text{FF}=0^{\circ}$	-	30	35	ms	<u>Note 5</u>
<b>Color Coordinate of CIE1931</b>	Rx	$\theta=0^{\circ}$	0.583	0.613	0.643	-	<u>Note 6</u>
	Ry		0.316	0.346	0.376		
	Gx		0.291	0.321	0.351		
	Gy		0.550	0.580	0.610		
	Bx		0.123	0.153	0.183		
	By		0.071	0.101	0.131		
	Wx		0.263	0.313	0.363		
	Wy		0.279	0.329	0.379		
<b>NTSC Ratio</b>	NTSC	CIE1931	50	55	--	%	<u>Note 7</u>
<b>Polarization Direction of Front Polarizer</b>	PdF			45°		deg	<u>Note 8</u>
<b>Polarization Direction of Rear Polarizer</b>	PdR			45°		Deg	
<b>Gray inversion angle</b>				6点钟			<u>Note 9</u>

PRODUCT GROUP	REV	ISSUE DATE	<b>BOE</b>
TFT- LCD PRODUCT	P1	2022-1-20	
SPEC. NUMBER	SPEC. TITLE		PAGE
S8-*	B3 ET121S0M-N14 Product Specification		17 OF 29

### Note1:Luminance measurement


The test condition is at  $I_{LED}=150mA$  and measured on the surface of LCD module at  $25^{\circ}C$ .

- The data are measured after LEDs are lighted on for more than 5 minutes and LCM displays are fully white. The brightness is the center of the LCD. Measurement equipment CS2000 or similar equipments (Field of view:1deg, Distance:50cm)
- Measuring surroundings: Dark room.
- Measuring temperature:  $T_a=25^{\circ}C$ .
- Adjust operating voltage to get optimum contrast at the center of the display.
- Measured value at the center point of LCD panel must be after more than 5 minutes while backlight turning on.

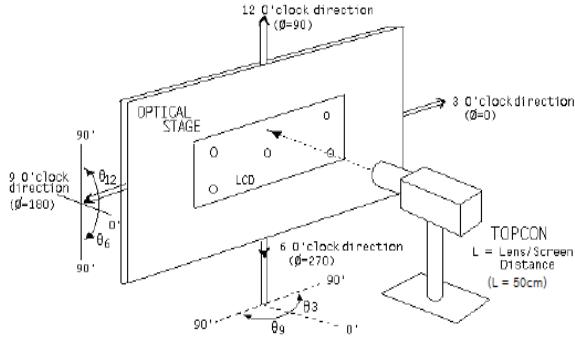

### Note2:Uniformity

- The test condition is at  $I_{LED}=150mA$  and measured on the surface of LCD module at  $25^{\circ}C$ .
- Measurement equipment:CS2000 or similar equipments
- The luminance uniformity is calculated by using following formula:
- $\Delta B_p = B_p (\text{Min.}) / B_p (\text{Max.}) \times 100 (\%)$
- $B_p (\text{Max.})$  = Maximum brightness in 9 measured spots
- $B_p (\text{Min.})$  = Minimum brightness in 9 measured spots.

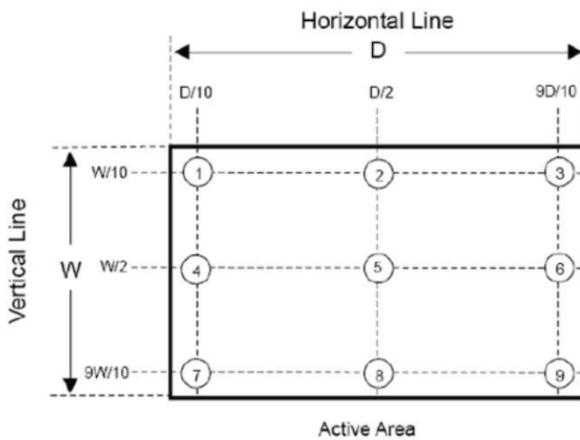


R2015-6014-O

PRODUCT GROUP	REV	ISSUE DATE	BOE
TFT- LCD PRODUCT	P1	2022-1-20	
SPEC. NUMBER	SPEC. TITLE		PAGE
S8-*	B3 ET121S0M-N14 Product Specification		18 OF 29

### Note 3: The definition of Viewing Angle

Refer to the graph below marked by  $\theta$  and  $\phi$ .

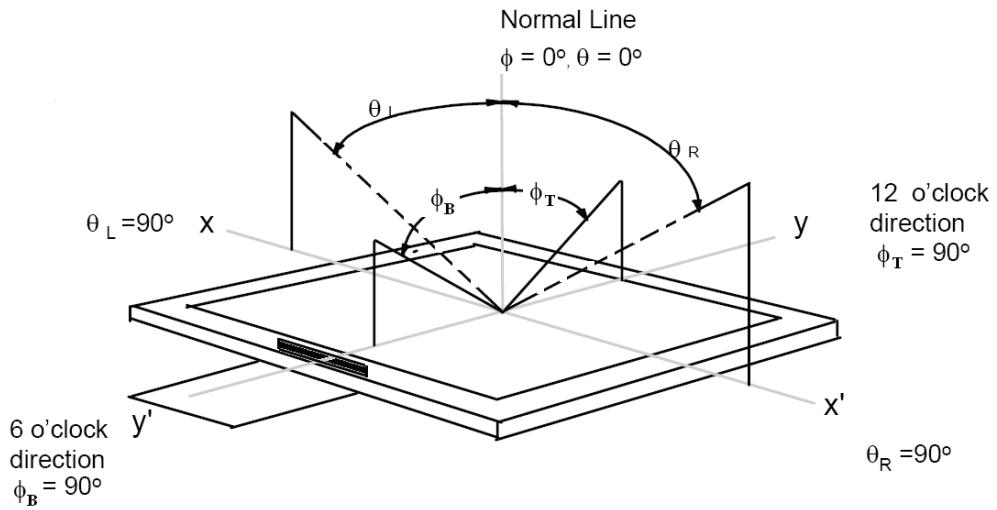


### Note 4: The definition of Contrast Ratio (Test LCM using CS2000 or similar equipments):

$$\text{Contrast Ratio(CR)} = \frac{\text{Luminance When LCD is at "White" state}}{\text{Luminance When LCD is at "Black" state}}$$

(Contrast Ratio is measured in optimum common electrode voltage)

### Note 5: Definition of Response time. (Test LCD using DMS501 or similar equipments):

The output sign also photo detector are measured when the input sign also are changed from "black" to "white" (Voltage falling time) and from "white" to "black" (Voltage rising time), respectively. The response time is defined as the time interval between the 10% and 90% of amplitudes. Refer to figures below.

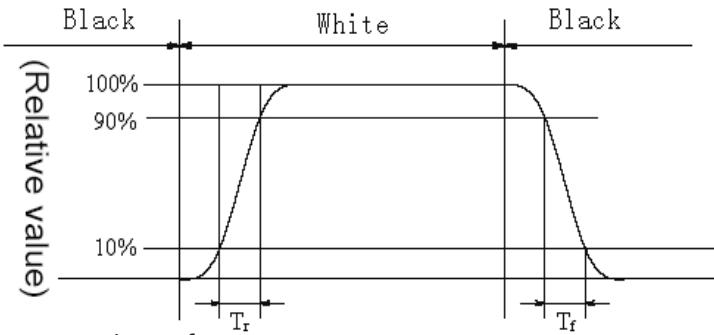

Response time of gray to gray:

Measurement equipment: DMS501 or similar equipments.

Test method: we define 8 grays L0-L7, the grays of L0-L7 were defined as: 0, 36, 73, 109, 146, 182, 219, 255. The output signals of photodetector are measured when the input signals are changed from "Lx" to "Ly",  $x, y = [0, 7]$ . The response time is defined as the time interval between the 10% and 90% of amplitudes. The result of the test can be noted as below:

	L0	L1	L2	L3	L4	L5	L6	L7
L0	█							
L1		█						
L2			█					
L3				█				
L4					█			
L5						█		
L6							█	
L7								█

R2015-6014-O

PRODUCT GROUP	REV	ISSUE DATE	<b>BOE</b>
TFT- LCD PRODUCT	P1	2022-1-20	
SPEC. NUMBER	SPEC. TITLE		PAGE
S8-*	B3 ET121S0M-N14 Product Specification		19 OF 29

#### Note 6: Color Coordinates of CIE 1931


The test condition is at ILED=150mA and measured on the surface of LCD module at 25°C.

Measurement equipment:CS2000 or similar equipments

The Color Coordinate (CIE 1931) is the measurement of the center of the display shown in below figure.


#### Note 7: Definition of Color of CIE Coordinate and NTSC Ratio.

$$S = \frac{\text{area of RGB triangle}}{\text{area of NTSC triangle}} \times 100\%$$

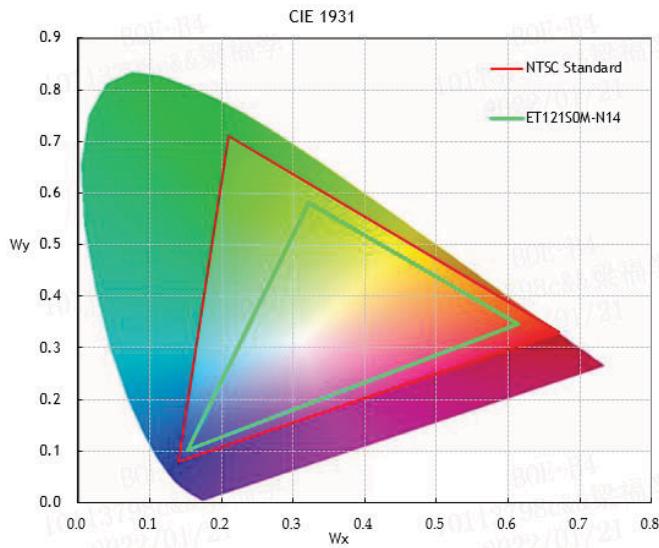


#### Note 8: Polarization Direction Definition

- Viewing direction is normal user viewing direction which is vertical to the display surface
- The polarizer which is closer to viewer is defined as Front Polarizer
- The polarizer which is on the rear side of viewer is defined as Rear Polarizer
- The X axis is defined as parallel line to top & bottom sidelines of the Active Area
- PdR which is marked in blue arrow is polarization degree of Front polarizer
- PdB which is marked in red arrow is polarization degree of Back polarizer
- The polarization degree parameter must be indicated in range of 0deg to 180deg according to above definition

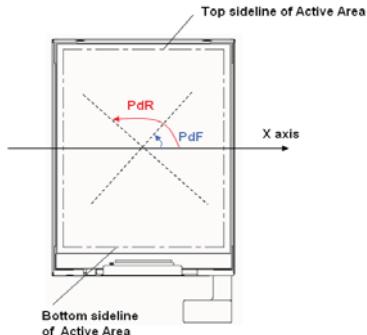

R2015-6014-O

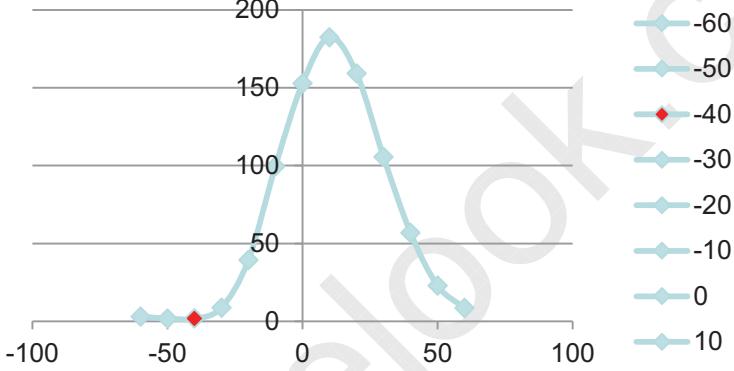PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>								
TFT- LCD PRODUCT		P1	2022-1-20									
SPEC. NUMBER	SPEC. TITLE			PAGE								
S8-*	B3 ET121S0M-N14 Product Specification			20 OF 29								
<b>Note 9: Definition of gray inversion angle</b> <ul style="list-style-type: none"> <li>● Refer to the graph of note 9.</li> <li>● Using luminance test method.</li> <li>● Test pattern : 128 gray</li> <li>● If the viewing direction is 12 o' clock ,then test the luminance while <math>\theta=-60^\circ, \theta=-50^\circ, \theta=-40^\circ, \theta=-30^\circ, \theta=-20^\circ, \theta=-10^\circ, \theta=0^\circ, \theta=10^\circ, \theta=20^\circ, \theta=30^\circ, \theta=40^\circ, \theta=-50^\circ, \theta=60^\circ</math>. The luminance test as figure below:</li> </ul>												
 <table border="1"> <caption>Legend for Viewing Angles (θ)</caption> <tr><td>-60</td></tr> <tr><td>-50</td></tr> <tr><td>-40</td></tr> <tr><td>-30</td></tr> <tr><td>-20</td></tr> <tr><td>-10</td></tr> <tr><td>0</td></tr> <tr><td>10</td></tr> </table>					-60	-50	-40	-30	-20	-10	0	10
-60												
-50												
-40												
-30												
-20												
-10												
0												
10												

R2015-6014-O

PRODUCT GROUP		REV	ISSUE DATE	BOE
TFT- LCD PRODUCT		P1	2022-1-20	
SPEC. NUMBER S8-*	SPEC. TITLE B3 ET121S0M-N14 Product Specification		PAGE 21 OF 29	

## 5.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

**<Table 17. Reliability Test Parameters >**

No	Test Items	Conditions
1	High temperature storage test	80°C, 240hr
2	Low temperature storage test	-30°C, 240hr
3	High temperature & high humidity (operation test)	60°C, 90%RH, 240hr
4	Low temperature operation test	-20°C, 240hr
5	High temperature operation test	70°C, 240hr
6	Thermal Shock Test	-40°C~85°C, 1hr/cycle, 100cycle
7	ALT	-10°C~65°C, 0%~93%, 24hr/cycle, 10 cycle
8	PCT	121°C, 100%RH, 2atm, 12hr
9	ESD	150pF, 330Ω, ±6kV(Contact), ±8kV (Air)
10	Packing VIB	1.47G, 1-200hz, X, Y, ±Z, 30min/Axis




Remark : Vertical line appear when the temperature is below 10°C

R2015-6014-O

PRODUCT GROUP		REV	ISSUE DATE	BOE
TFT- LCD PRODUCT		P1	2022-1-20	
SPEC. NUMBER	SPEC. TITLE			PAGE
S8-*	B3 ET121S0M-N14 Product Specification			22 OF 29

## 6.0 PACKING INFORMATION(产品形态: LCM )

### Packing procedure:

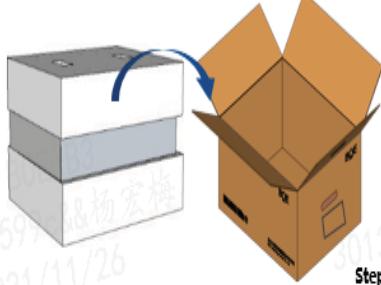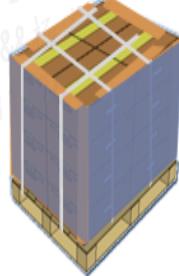将2pcs LCM 平放入Tray, panel向上放置 产品上放置1pcs EPE PAD	将盛装LCM的Tray叠码10层, 然后在整摞上面放1个空Tray, 然后放入屏蔽袋中抽真空;	将1包产品上下各扣一个EPE Cover, 然后放入Inner Box;
2 LCM/2 EPE PAD/Tray	20 LCM/20 EPE PAD/11 Tray;	20 LCM/2 EPE Cover/Inner Box;
 Step 1	 Step 2	 Step 3
采用“一”字形封箱方式, 对Inner Box进行封箱, 并在Box的Mark处粘贴相应标签; 20 LCM/Inner Box;	Box四层码拍, 每层4箱 (2*2放置), Box标签统一朝向外侧以便扫码, 捆绑带“井”字型打包, pallet外进行缠绕膜包装; 320 LCM /16 Inner Box/Pallet;	车厢装载方式: 一横一竖双层码放 车厢装载量_12m: 12800pcs (40托)
 Step 4	 Step 5	 Step 6

### 6.1 Packing Note(产品形态: LCM)


- Box Dimension: 607mm(W) x 507mm(D) x 240mm(H)
- Package Quantity in one Box: 20pcs

R2015-6014-O

PRODUCT GROUP		REV	ISSUE DATE	BOE
TFT- LCD PRODUCT		P1	2022-1-20	
SPEC. NUMBER S8-*	SPEC. TITLE B3 ET121S0M-N14 Product Specification			PAGE 23 OF 29

## 6.2 Box label (产品形态: )


- Label Size :110mm\*55mm
- Contents  
Model : LCM  
Q'ty : 20pcs/Box  
Serial No. : Box Serial No. as shown below.  
Date : Packing Date  
FG Code : FG Code of Product

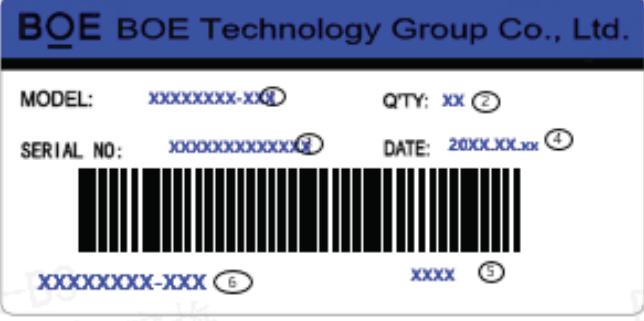Item	Box Label																																																								
Picture																																																									
代号 说明	<p>序列号标注部分需打印, 说明如下:</p> <ol style="list-style-type: none"> <li>FG-CODE(前12位) : <b>ET121S0M-N14</b></li> <li>产品数量: <b>20</b></li> <li>Box ID</li> <li>包装日期</li> <li>FG-Code后四位:<b>BHPO</b></li> <li>客户料号: <b>BA121S01-200</b></li> </ol> <p>Total Size:110×55mm</p>																																																								
编码 规则	<table border="1"> <thead> <tr> <th>Digit</th><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th><th>8</th><th>9</th><th>10</th><th>11</th><th>12</th><th>13</th></tr> <tr> <th>Code</th><td>S</td><td>L</td><td>S</td><td>S</td><td>1</td><td>2</td><td>3</td><td>D</td><td>0</td><td>0</td><td>0</td><td>6</td><td>8</td></tr> <tr> <th>Description</th><td>Products/GSN</td><td>Grade</td><td>Line</td><td>Year</td><td>Month</td><td>Revision Code</td><td colspan="7">Serial Number</td></tr> </thead> <tbody> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	Digit	1	2	3	4	5	6	7	8	9	10	11	12	13	Code	S	L	S	S	1	2	3	D	0	0	0	6	8	Description	Products/GSN	Grade	Line	Year	Month	Revision Code	Serial Number																				
Digit	1	2	3	4	5	6	7	8	9	10	11	12	13																																												
Code	S	L	S	S	1	2	3	D	0	0	0	6	8																																												
Description	Products/GSN	Grade	Line	Year	Month	Revision Code	Serial Number																																																		

R2015-6014-O

PRODUCT GROUP		REV	ISSUE DATE	BOE
TFT- LCD PRODUCT		P1	2022-1-20	
SPEC. NUMBER	SPEC. TITLE			PAGE
S8-*	B3 ET121S0M-N14 Product Specification			24 OF 29

## 7.0 Product Label

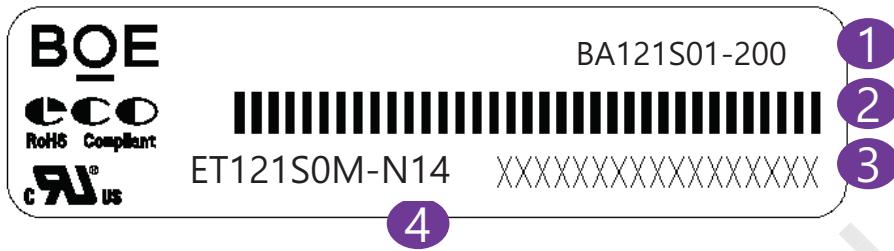

Label Size: 80mmx25mmx0.08mm,

1. Customer Code
2. MDL ID bar code
3. MDL ID
4. FG-CODE First 12 digits

### BOE MDL ID rule

No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Code	X	X	S	3	8	3	2	D	8	5	0	0	0	0	0	2	1
	GBN	Grade	B3	Year	Month	Day	FG Code last four digits				Serial number						

R2015-6014-O

PRODUCT GROUP	REV	ISSUE DATE	BOE
TFT- LCD PRODUCT	P1	2022-1-20	
SPEC. NUMBER	SPEC. TITLE		PAGE
S8-*	B3 ET121S0M-N14 Product Specification		25 OF 29

## 8.0 Handling & Cautions

### 8.1 Mounting Method

- The panel of the LCD consists of two thin glasses with polarizers which easily get damaged. So extreme care should be taken when handling the LCD.
- Excessive stress or pressure on the glass of the LCD should be avoided. Care must be taken to insure that no torsional or compressive forces are applied to the LCD unit when it is mounted.
- If the customer's set presses the main parts of the LCD, the LCD may show the abnormal display. But this phenomenon does not mean the malfunction of the LCD and should be pressed by the way of mutual agreement.
- To determine the optimum mounting angle, refer to the viewing angle range in the specification for each model.
- Mount a LCD module with the specified mounting parts.

### 8.2 Caution of LCD Handling and Cleaning

- Since the LCD is made of glass, do not apply strong mechanical impact or static load onto it. Handling with care since shock, vibration, and careless handling may seriously affect the product. If it falls from a high place or receives a strong shock, the glass may be broken.
- The polarizers on the surface of panel are made from organic substances. Be very careful for chemicals not to touch the polarizers or it leads the polarizers to be deteriorated.
- If the use of a chemical is unavoidable, use soft cloth with solvent (recommended below) to clean the LCD 's surface with wipe lightly.
  - IPA(Isopropyl Alcohol), Ethyl Alcohol, Trichlorotrifluoroethane
- Do not wipe the LCD's surface with dry or hard materials that will damage the polarizers and others. Do not use the following solvent.
  - Water, Ketone, Aromatics
- It is recommended that the LCD be handled with soft gloves during assembly, etc. The polarizers on the LCD's surface are vulnerable to scratch and thus to be damaged by sharp particles.
- Do not drop water or any chemicals onto the LCD's surface.
- A protective film is supplied on the LCD and should be left in place until the LCD is required for operation.
- The ITO pad area needs special careful caution because it could be easily corroded. Do not contact the ITO pad area with HCFC, Soldering flux, Chlorine, Sulfur, saliva or fingerprint. To prevent the ITO corrosion, customers are recommended that the ITO area would be covered by UV or silicon.

PRODUCT GROUP	REV	ISSUE DATE	BOE
TFT- LCD PRODUCT	P1	2022-1-20	
SPEC. NUMBER	SPEC. TITLE		PAGE
S8-*	B3 ET121S0M-N14 Product Specification		26 OF 29

### 8.3 Caution Against Static Charge

- The LCD modules use C-MOS LSI drivers, so customers are recommended that any unused input terminal would be connected to Vdd or Vss, do not input any signals before power is turn on, and ground you body, work/assembly area, assembly equipments to protect against static electricity.
- Remove the protective film slowly, keeping the removing direction approximate 30-degree not vertical from panel surface, If possible, under ESD control device like ion blower, and the humidity of working room should be kept over 50%RH to reduce the risk of static charge.
- Avoid the use work clothing made of synthetic fibers. We recommend cotton clothing or other conductivity-treated fibers.
- In handling the LCD, wear non-charged material gloves. And the conducting wrist to the earth and the conducting shoes to the earth are necessary.

### 8.4 Caution For operation

- It is indispensable to drive the LCD within the specified voltage limit since the higher Voltage than the limit causes the shorter LCD's life. An electro-chemical reaction due to DC causes undesirable deterioration of the LCD so that the use of DC drive should avoid.
- Do not connect or disconnect the LCD to or from the system when power is on.
- Never use the LCD under abnormal conditions of high temperature and high humidity.
- When expose to drastic fluctuation of temperature (hot to cold or cold to hot) ,the LCD may be affected; Specifically, drastic temperature fluctuation from cold to hot ,produces dew on the LCD's surface which may affect the operation of the polarizer and the LCD.
- Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD may turn black at temperature above its operational range. However those phenomena do not mean malfunction or out of order with the LCD. The LCD will revert to normal operation once the temperature returns to the recommended temperature range for normal operation.
- Do not display the fixed pattern for a long time because it may develop image sticking due to the LCD structure. If the screen is displayed with fixed pattern, use a screen saver.

PRODUCT GROUP	REV	ISSUE DATE	BOE
TFT- LCD PRODUCT	P1	2022-1-20	
SPEC. NUMBER	SPEC. TITLE		PAGE
S8-*	B3 ET121S0M-N14 Product Specification		27 OF 29

## 8.5 Packaging

- Modules use LCD element, and must be treated as such.
  - Avoid intense shock and falls from a height.
  - To prevent modules from degradation, do not operate or store them exposed directly to sunshine or high temperature/humidity for long periods.

## 8.6 Storage

- A slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit. Relative humidity of the environment should therefore be kept below 60%RH.
- Original protective film should be used on LCD' s surface (polarizer). Adhesive type protective film should be avoided, because it may change color and/or properties of the polarizers.
- Do not store the LCD near organic solvents or corrosive gasses.
- Keep the LCD safe from vibration, shock and pressure.
- Black or white air-bubbles may be produced if the LCD is stored for long time in the lower temperature or mechanical shocks are applied onto the LCD.
- In the case of storing for a long period of time for the purpose or replacement use, the following ways are recommended.
  - Store in a polyethylene bag with sealed so as not to enter fresh air outside in it.
  - Store in a dark place where neither exposure to direct sunlight nor light is.
  - Keep temperature in the specified storage temperature range.
  - Store with no touch on polarizer surface by the anything else. If possible, store the LCD in the packaging situation LCD when it was delivered.

## 8.7 Safety


- For the crash damaged or unnecessary LCD, it is recommended to wash off liquid crystal by either of solvents such as acetone and ethanol an should be burned up later.
- In the case the LCD is broken, watch out whether liquid crystal leaks out or not. If your hands touch the liquid crystal, wash your hands cleanly with water an soap as soon as possible.
- If you should swallow the liquid crystal, first, wash your mouth thoroughly with water, then drink a lot of water and induce vomiting, and then, consult a physician.
- If the liquid crystal should get in your eyes, flush your eyes with running water for at least fifteen minutes.
- If the liquid crystal touches your skin or clothes, remove it and wash the affected part of your skin or clothes with soap and running water.

PRODUCT GROUP	REV	ISSUE DATE	BOE
TFT- LCD PRODUCT	P1	2022-1-20	
SPEC. NUMBER	SPEC. TITLE		PAGE
S8-*	B3 ET121S0M-N14 Product Specification		28 OF 29

## 9.0 APPENDIX

### Mechanical Drawing

Drawing Attachment: Front

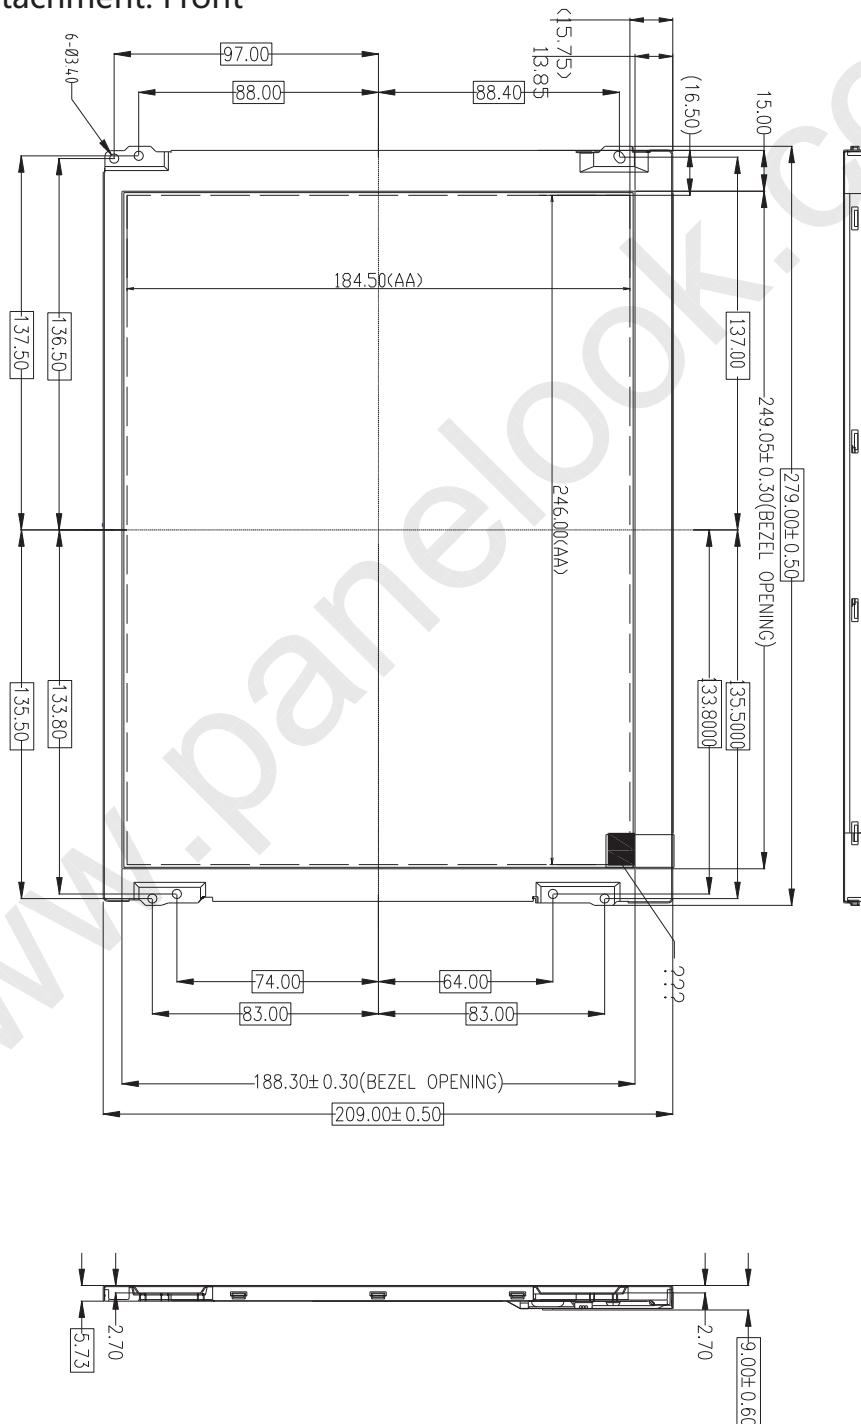


R2015-6014-O

PRODUCT GROUP	REV	ISSUE DATE	BOE
TFT- LCD PRODUCT	P1	2022-1-20	
SPEC. NUMBER	SPEC. TITLE		PAGE
S8-*	B3 ET121S0M-N14 Product Specification		28 OF 29

## Mechanical Drawing

Drawing Attachment: Back

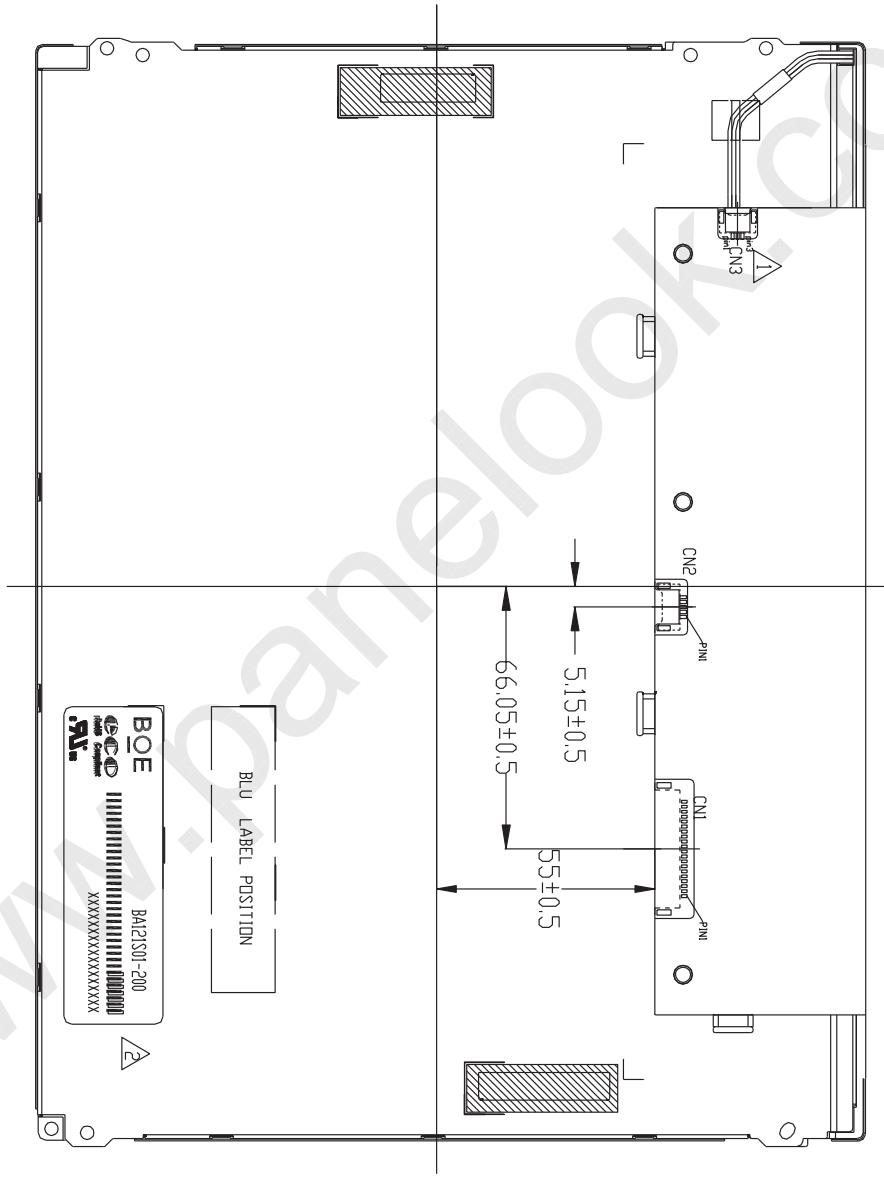

1. Connector 1: MSB240420HEA
2. Connector 2: MSB24038P5
3. OPERATING TEMP: -20°C TO 70°C
4. STORAGE TEMP: -30°C TO 80°C

R2015-6014-O

<b>BOE</b>	<b>BOE</b> BOE Technology Group Co., Ltd.	page number: - 1/ 9 -
File Name	Incoming Inspection Spec For Customer	version: Rev.0
		Effective date: 2020.11.16

## Incoming Inspection Spec Approval Sheet

**Product Description:** TFT-LCD MDL

**Product Name:**

**Customer :**

Customer Signature	Date	BOE Signature	Date

<b>BOE</b>	<b>BOE</b> BOE Technology Group Co., Ltd.	page number: - 2 / 9 - version: Rev.0
File Name	Incoming Inspection Spec For Customer	Effective date: 2020.11.16

# Record of Revision

<b>BOE</b>	<b>BOE</b> BOE Technology Group Co., Ltd.	page number: - 3/ 9 -
File Name	Incoming Inspection Spec For Customer	
		version: Rev.0 Effective date: 2020.11.16

## Content

### A: Incoming Inspection Specification

1. Introduction
  - 1.1. Scope
  - 1.2. Incoming Inspection Right
  - 1.3. Operation Instruction
2. Generals
  - 2.1. Sampling Method
  - 2.2. Inspection Environment
  - 2.3. Definitions
3. Inspection Criteria
  - 3.1. Visual Inspection Criteria
  - 3.2. Appearance Inspection Criteria

### B: Customer Quality Service Process

<b>BOE</b>	<b>BOE</b> BOE Technology Group Co., Ltd.	page number: - 4/ 9 -
File Name	Incoming Inspection Spec For Customer	
		version: Rev.0
		Effective date: 2020.11.16

## A: Incoming Inspection Specification

### 1.0 Introduction

#### 1.1. Scope

This incoming Inspection Standard is limited to the TFT-LCD LCD which supplied by BOE Technology Group Co.,Ltd. (hereinafter called the "Supplier") to its Customer.

#### 1.2. Incoming inspection Right

The buyer (customer) shall inspect the LCD within twenty days from receiving as inspection period at its own cost. The results of the inspection, acceptance or rejection shall be notified to Supplier .

The buyer may, under commercially reasonable reject procedures, reject an entire lot within inspection period, define unacceptable LCD number in accordance with incoming inspection standard. Should the buyer fail to notify the result of the inspection to supplier within the inspection period, the buyer's right to reject the LCD shall lapse and whole lot shall be deemed to have been accepted by the buyer.

### 1.3. Operation Instruction

#### 1.3.1 Mounting Method

- As the panel of LCD which consists of two thin glasses with polarizers was easily get Damaged, please handling LCD cautiously.
- Excessive stress or pressure on the glass of the LCD should be avoided. Please insure that no torsional or compressive forces are applied to the LCD unit when it is mounted.
- Abnormal display may occur under press setting problem from customer, which does not mean the malfunction of the LCD and should be verified by both party.
- Optimum mounting angle was determined based on specified viewing angle range.
- Please assemble LCD module in accordance with the specification.
- Please mark condition of humiture.

#### 1.3.2 Caution of LCD Handling and Cleaning

- Since the LCD is made of glass, do not apply strong mechanical impact or static load onto it. Handling with care since shock, vibration, and careless handling may seriously affect the product. If it falls from a high place or receives a strong shock, the glass may be broken.
- The polarizers on the surface of panel are made from organic substances. Be very careful for chemicals that not to touch the polarizers or it may leads the polarizers to be deteriorated.
- If the use of a chemical is unavoidable, use soft cloth with solvent (recommended below) to clean the LCD's surface with wipe lightly.  
-IPA(Isopropyl Alcohol),Ethyl Alcohol, Trichlorotriflorothane
- Do not wipe the LCD's surface with dry or hard materials that will damage the polarizers

<b>BOE</b>	<b>BOE</b> BOE Technology Group Co., Ltd.	page number: - 5 / 9 - version: Rev.0
File Name	Incoming Inspection Spec For Customer	Effective date: 2020.11.16

and others. Do not use the following solvent.

-Water, Ketone, Aromatics

- It is recommended that the LCD be handled with soft material during assembly, etc. The polarizers on the LCD's surface are vulnerable to scratch and thus to be damaged by sharp particles.
- Do not drop water or any chemicals onto the LCD's surface.
- A protective film is supplied on the LCD and should be left in place until the LCD is required for operation.
- The ITO pad area needs special careful caution because it could be easily corroded. Do not contact the ITO pad area with HCFC, Soldering flux, Chlorine, Sulfur, saliva or fingerprint. To prevent the ITO corrosion, customers are recommended that the ITO area would be covered by UV or silicon. LCD should be stored in static-protective & vacuum polythene bag, please assemble it When it expose to the air within 3 days to avoid ITO corrosion
- Please clean the LCD without ultrasonic to avoid line open.
- Temperature of clean and bake should be less than 80°C.

### 1.3.3 Caution Against Static Charge

- The LCD modules use C-MOS LSI drivers, so customers are recommended that any unused input terminal would be connected to Vdd or Vss, do not input any signals before power is turn on, and ground you body, work/assembly area, assembly equipments to protect against static electricity.
- Remove the protective film slowly, keeping the removing direction approximate 30-degree not vertical from panel surface, if possible, under ESD control device like ion blower, and the humidity of working room should be kept over 50%RH to reduce the risk of static charge.
- Avoid the use work clothing made of synthetic fibers. We recommend cotton clothing or other conductivity-treated fibers.
- In handling the LCD, wear non-charged material gloves. And the conducting wrist to the earth and the conducting shoes to the earth are necessary.

### 1.3.4 Caution For operation

- It is indispensable to drive the LCD within the specified voltage limit since the higher Voltage than the limit causes the shorter LCD's life. An electro-chemical reaction due to DC causes undesirable deterioration of the LCD so that the use of DC drive should avoid.
- Do not connect or disconnect the LCD to or from the system when power is on.
- Never use the LCD under abnormal conditions of high temperature and high humidity.
- When expose to drastic fluctuation of temperature(hot to cold or cold to hot) ,the LCD may be affected; specifically, drastic temperature fluctuation from cold to hot ,produces dew on the LCD's surface which may affect the operation of the polarizer and the LCD.
- Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD may turn black at

<b>BOE</b>	<b>BOE</b> BOE Technology Group Co., Ltd.	page number: - 6/ 9 -
File Name	Incoming Inspection Spec For Customer	version: Rev.0
		Effective date: 2020.11.16

temperature above its operational range. However those phenomena do not mean malfunction or out of order with the LCD. The LCD will revert to normal operation once the temperature returns to the recommended temperature range for normal operation.

- Do not display the fixed pattern for a long time because it may develop image sticking due to the LCD structure. If the screen is displayed with fixed pattern, use a screen saver.
- Static electricity (ESD) will damage the panel,. Please make sure that operators wear static-protective glove effectively and working tables &device are effectively grounded during operation and other ESD protective method
- Please place LCD on the tray provided by BOE while moving it, in order to avoid mechanical damage.
- LCD should be stored in required humidity. Low humidity may add static, while high humidity may corrode the ITO circuit of LCD product.
- Before use the LCD. Please check the Engineering specification.
- Please keep the LCD in the specified, original packing boxes when storage.
- LCD contain a small amount of Liquid Crystal and Mercury. Please follow local ordinances or regulations for disposal.
- DO NOT press the area covered with PET or such materials. These are weak point of LCD since of TCPs (Driver ICs) and PWBs.
- Please DO NOT touch the surface of glass (Polarizer).

<b>BOE</b>	<b>BOE</b> BOE Technology Group Co., Ltd.	page number: - 7/ 9 -
File Name	Incoming Inspection Spec For Customer	
		Effective date: 2020.11.16

## 2.0 Generals

### 2.1. Sampling Method

Unless otherwise agreed upon in writing ,the sampling inspection shall be applied to the customer's Incoming inspection.

**2.1.1. Lot Size:** 1 pallet per same model;

**2.1.2. Sampling type:** Random sampling;

**2.1.3. Inspection level:** ||

**2.1.4. Sampling table:** MIL-STD-105E

Major Defect: AQL=0.65

Minor Defect: AQL=1.5

### 2.2. Inspection Environment

#### 2.2.1. Inspection environment conditions:

a. Room temperature: 25±5 °C ;

b. Humidity: 65 ± 5% RH;

c. Inspection Ambient Illumination : 300~700 Lux (150~250 Lux for function test);

#### 2.2.2. Viewing Distance

The distance between the panel and the inspector's eyes shall be at 30CM~50CM;

#### 2.2.3. Viewing Angle

performing in front of the panel All directions for inspecting the sample should be:

ADS Production: within 45° to perpendicular line.;

TN Production: within 10° to perpendicular line.;

#### 2.2.4. Inspection Area :

Display Area (Active Area)

## 2.3. Main Defect Definitions

### 2.3.1. Black / White Spots

Points on display which appear Black/ white at L0/L127/L255 .

### 2.3.2. Dark / Bright Lines

Lines on display which appear dark/bright at R/G/B. such as vertical, horizontal, or cross lines.

### 2.3.3. Bright Dot Defects

Dots(sub-pixels) on display which appear bright in the display area at R/G/B.

### 2.3.4. Dark Dot Defects

Dots(sub-pixels) on display which appear dark in the display area at R,G,B Color Pattern.

### 2.3.5. Mura

Mura on display which appears darker / brighter against background brightness on parts of display area at L0/L127/L255

### 2.3.6. Visual Inspection

Inspect PNL in operation

### 2.3.7. Appearance Inspection

External inspection for Panel in Non Operation

<b>BOE</b>	<b>BOE</b> BOE Technology Group Co., Ltd.	page number: - 8/ 9 -
File Name	Incoming Inspection Spec For Customer	version: Rev.0
		Effective date: 2020.11.16

### 3.0 Inspection Criteria

#### 3.1. Visual Inspection Criteria

Dimensional unit: mm

Items	Details	Inspection Criteria			Type
		A Area	B/C Area	DS	
Visual ( Function ) Inspection	Foreign Material /Dent/ Bubble/ Spots//Extraneous Substances/Dot	Circular Type  Linear Type	0.1 < D ≤ 0.3, N ≤ 4  W ≤ 0.05 & L ≤ 2 N ≤ 4	Ignore	Minor
	Pixel Defects	Bright Dot	N ≤ 2		
		Dark Dot	N ≤ 3		
		Bright + Dark Dot	N ≤ 3		
	Line Defects	2S	0	≥ 15mm	Minor
		Bright Line, Dark Line	Not Allowed		
	No Display		Not Allowed	Ignore	Major
	Abnormal Display		Not Allowed		
	L0 Light leakage & Mura		5% ND not visible, or reference limit samples		
	Zara		10mm X 10mm area ≤ 15		
	Cross talk		2%		




**Remark:** The determination of all defects is based on the panel with Polarizer.

※ Note 1) D = Diameter, L = Length, W = Width, N = Number


※ Note 2) Definition of the Area A Area: Display area B/C Area: No display area

<b>BOE</b>	<b>BOE</b> BOE Technology Group Co., Ltd.	page number: - 9/ 9 - version: Rev.0
File Name	Incoming Inspection Spec For Customer	Effective date: 2020.11.16

$$D = (a + b) / 2$$

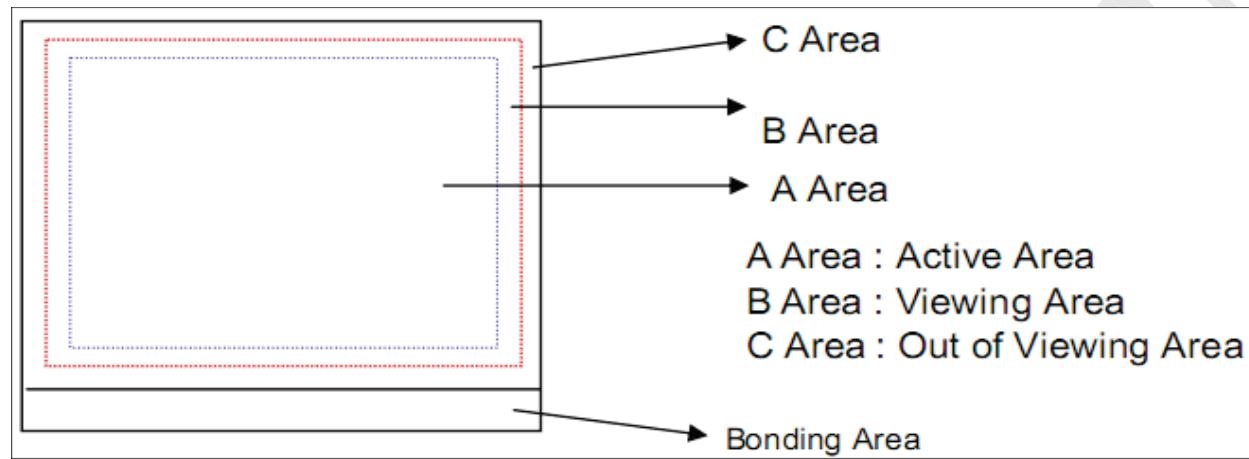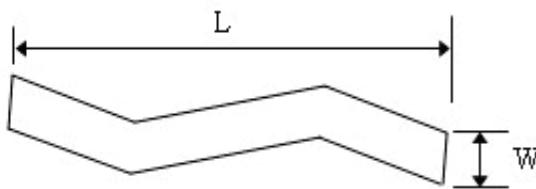


※Note 3) For pixel defect, dot means a sub-pixel. Dot defects should be larger than half size of a sub-pixel.  
 Dot which is invisible through 5% ND filter or smaller than 1/2 of sub-pixel size will not counted as "1 dot" defect.

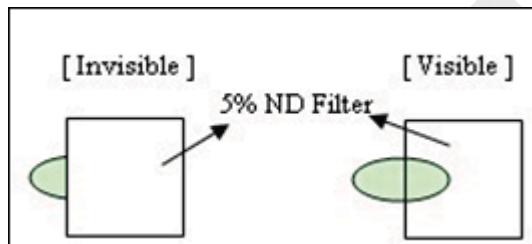

"No dot defect"  
(=ignored)

"1 dot defect"  
(=counted)

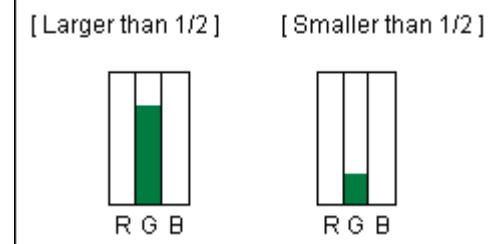


"1 dot defect"  
(=counted)


"No dot defect"  
(=ignored)

<b>BOE</b>	<b>BOE</b> BOE Technology Group Co., Ltd.	page number: - 10/ 9 - version: Rev.0
File Name	Incoming Inspection Spec For Customer	Effective date: 2020.11.16


[ 2 adjacent dots defect ]



Type 1



Type 2



Type 3

### 3.2. Appearance Inspection Criteria

location	Items	Criterion for Defects	Type	scope	
All	Stain		Slightly not Wipeable ignored	-	All
Be related to PNL	Crack		Not Allowed	Major	
	Side Chipping		Function and assembly are not affected	Minor	
	Corner Chipping		Function and assembly are not affected	Minor	
	Burr		Function and assembly are not affected	Minor	
	Scratch		PNL with POL, based on point/line foreign (scratch) standard to determine,	Minor	
Be related to FPC/PCB	short circuit / open circuit		Not Allowed	Major	
				Shipment status: FOG/MDL	

<b>BOE</b>	<b>BOE</b> BOE Technology Group Co., Ltd.	page number: - 11/ 9 - version: Rev.0
File Name	Incoming Inspection Spec For Customer	Effective date: 2020.11.16

	components and parts		Component missing is not allowed	Minor	Production
Be related to Backlight	Code-spurting		Key information can be identified is OK	Minor	Shipment status: MDL Production
	Scratch		Function and assembly are not affected	Minor	
	Stain		Slightly not Wipeable ignored	Minor	
Bezel	Inkjet defect	-	Steel seal/Ink marking clearly visible	Minor	
	Scratches / dents	-	Function and assembly are not affected,		
Screw	Missing/damaged/sliding wire		not allowed		
Tape	Missing, damaged	-	damaged :2*2mm, not affected lighting,ignored Missing ,not allowed		
Connector	PIN missing/damaged/ deformation	-	not allowed		
POL	Deviation	-	No access to AA area No access to glass edge		
	Dirty	-	Erasable ok		
	POL Bubble Line	-	Distance from AA area ≥0.65mm		
	Scratch/Dent	-	Followed Circular/Linear spec		

<b>BOE</b>	<b>BOE</b> BOE Technology Group Co., Ltd.	page number: - 12/ 9 -
File Name	Incoming Inspection Spec For Customer	
		version: Rev.0 Effective date: 2020.11.16

## B : BOE Customer Quality Service Process

In order to provide better service to Customer, BOE shall apply the after-sales product quality service process as below:

- 1.0. According to the P/O from Customer, BOE should deliver required product to the place appointed by Customer.
- 2.0. Customer will do IQC for the incoming product.
- 3.0. Inspection standard should be provided by BOE, and it will be valid after confirmed by Customer. Inspection and Defects determination should be carried out according to the standard agreed by both Parties.
- 4.0. In order to guarantee in-time communication of product quality information and effective service, QA staff on Customer side should send Weekly Quality Report to the appointed CS staff in BOE.
- 5.0.. BOE should cooperate with Customer for special quality requirement.
- 6.0. After confirmed by both side, BOE should be responsible for the defect products which caused by its quality problem.
- 7.0.. Customer should use the LCD product according to the instruction. BOE will not be responsible for the defect product caused by violation of Users' Instruction.
- 8.0. Both parties should deal with the quality problem with friendly cooperative policy. And both parties should negotiate to deal with the defect products of which the responsibility is not very clear.
- 9.0. The warranty of the product is 12 months after the delivery date.

### The warranty will be avoided in cases of below:

- a. When the warranty period is expired.
- b. When the LCMs were repaired by 3rd party without Supplier's approval.
- c. When the LCMs were treated like disassemble and rework by the Customer and/or customer's representatives without Supplier's approval.